


Product Data Sheet


Structural Steel HLL Anchorage Options

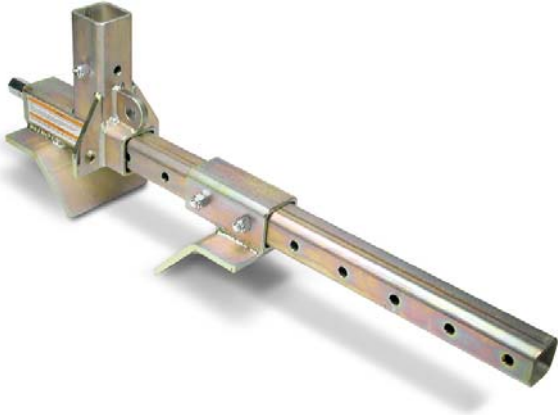

6230

HLL Stanchion Beam Clamp (Wide)


- ◆ Flange Width: 6" to 28"
- ◆ Flange Thickness: 1/2" to 2"
- ◆ Rated to 14,500 lbs

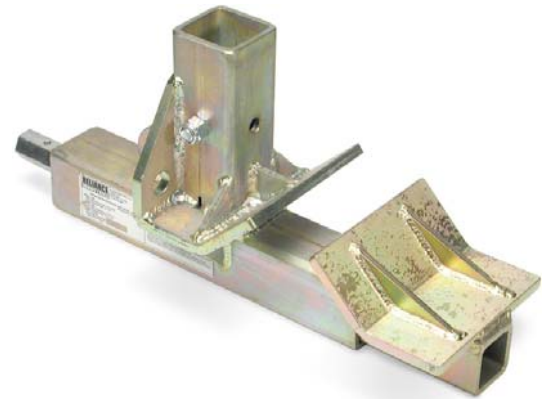

6235

HLL Stanchion Beam Clamp (Inverted)


- ◆ Flange Width: 4-1/2" to 14"
- ◆ Flange Thickness 1/2" to 1-1/2"
- ◆ Rated to 14,500 lbs

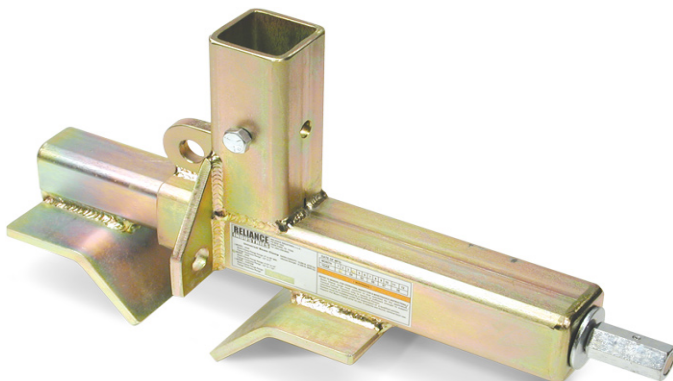

6240

HLL Stanchion Beam Clamp (Universal)

- ◆ Flange Width: 4-1/2" to 14"
- ◆ Flange Thickness 1/2" to 1-1/2"
- ◆ Rated to 14,500 lbs

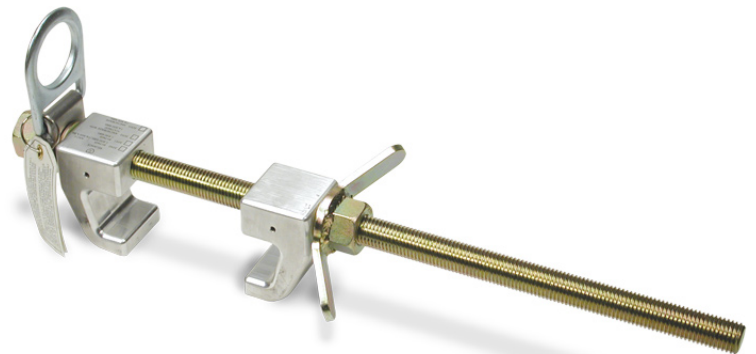

3093

HLL Anchor Clamp

- ◆ Flange Width: 4" to 16-5/8"
- ◆ Flange Thickness 1/2" to 1-3/4"
- ◆ Rated to 14,500 lbs

Reliance Industries L.L.C.

P.O. Box 2046

Deer Park, TX 77536

Toll Free 888-362-2826 · Fax 281-930-8666

Visit us at www.relsafe.com

RELIANCE
INDUSTRIES